




Assembly Instructions


For further information go to
www.kiwistretchladder.nz

Step 0 : What's in the box?

Part	Description	Qty
A	Feet	2
B	Legs	2
C	Crossbars – see inset picture D. These cross bars do not have insert nuts	3
D	Crossbars- see inset picture as well. These cross bars have insert nuts	2
E	Crossbar Pads	2
F	Pad Covers	2
G	JCB Screws M6 x 60mm	8
H	Hex key (not shown)	1

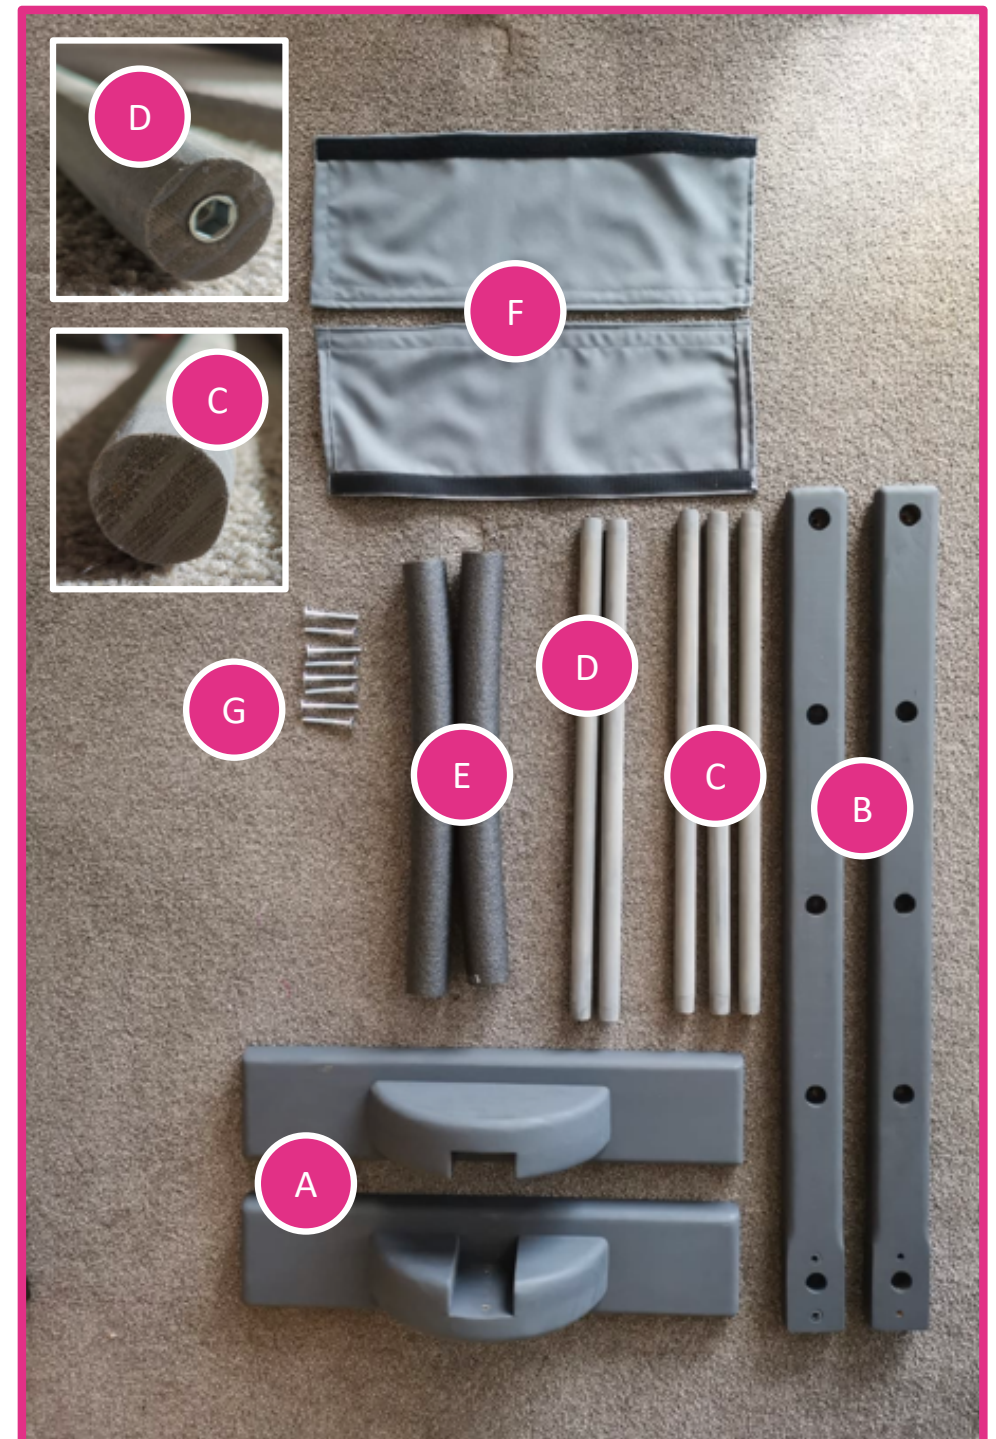

Step 1 : assemble feet

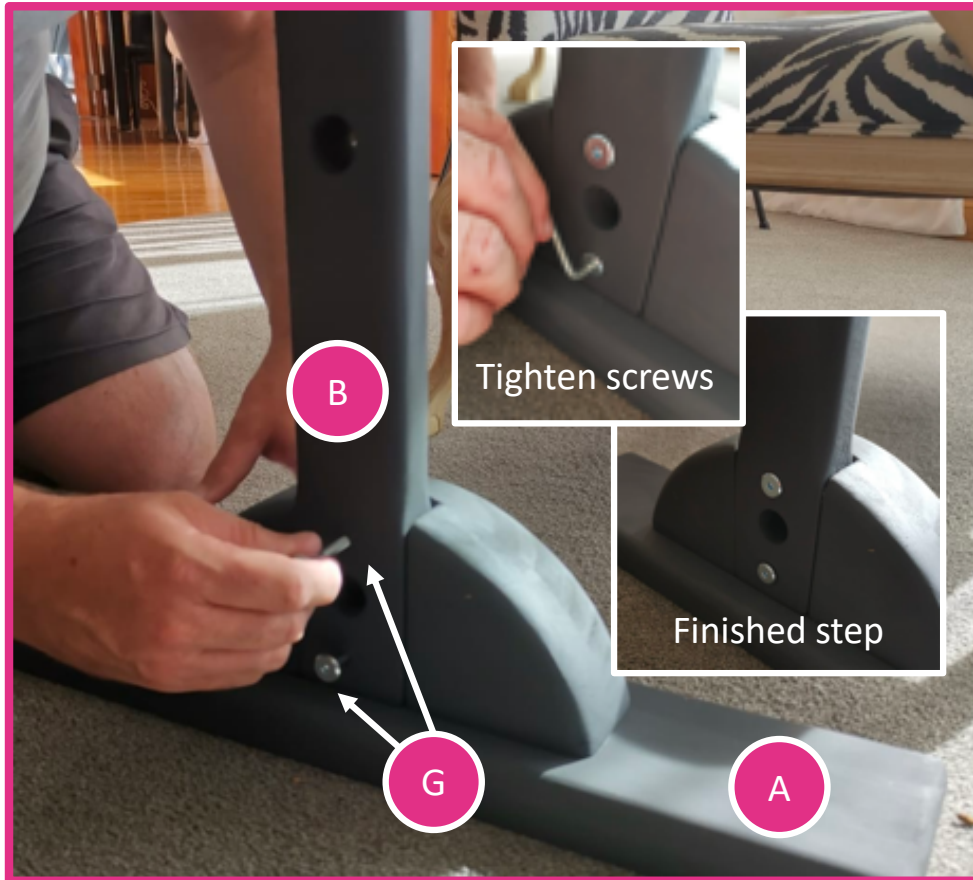

Step 1A: Place foot (part A) on floor and insert leg (part B) in to gap as shown above.

Step 1B: Insert JCB screws (part G) through the holes in the foot and screw inserts in part A

Step 1C: Tighten the JCB screws with the hex key provided as shown in the insert above.

Step 1D: Repeat steps 1A and 1B for the second foot and leg. They should look like the finished step picture.


Step 2 : insert cross bars to leg



Step 2A: Lay one of the assembled feet on the ground with the 5 cross bar holes facing up

Step 2B: Insert cross bars as shown. Be sure to match the cross bars with insert nuts (Part D) and cross bars without insert nuts (Part C) as shown in the pattern above.



Step 3 : add second leg

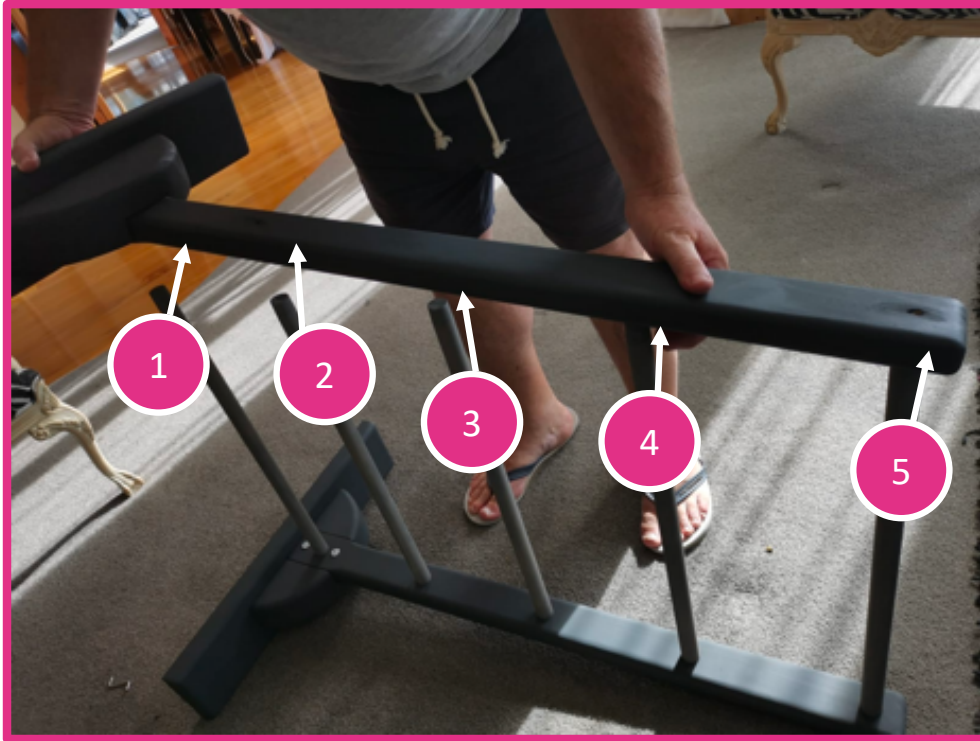

Step 3A: Align cross bar holes with cross bars. It is best to start at the foot (heavy) end and align the cross bar in to the relevant hole of the leg as shown in the order above.

Step 3B: Push down firmly

Step 4 : screw cross bars

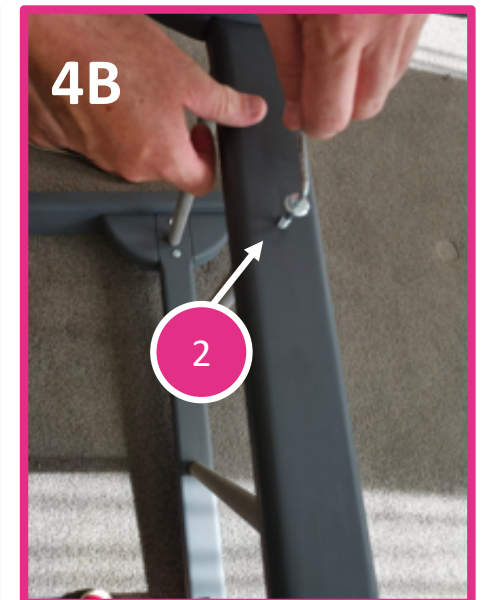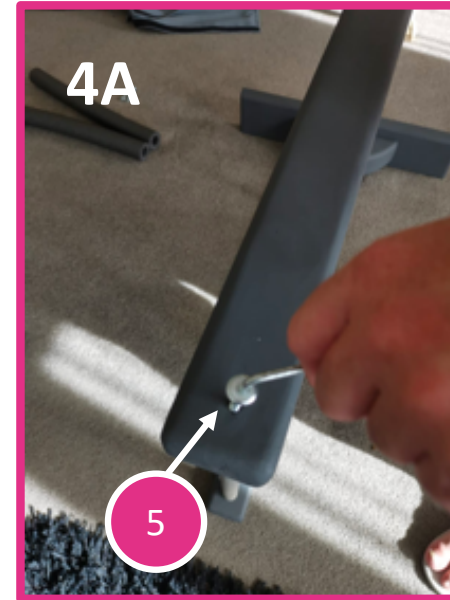

Step 4A: Insert JCB screw through top hole (5) in leg and into screw insert in cross bar. Tighten with hex key.

Step 4B: Insert JCB screw through bottom hole (2) in leg and into screw insert in cross bar. Tighten with hex key.

Step 4C: Flip stretch ladder carefully so not to let cross bars slip out and repeat step 4A and 4B whilst in the upright position.

Step 5 : add cross bar pads




Step 5A: Take the crossbar pad (Part E) and place it over the cross bar of your choice by locating the split in the cylinder and pulling it over the cross bar.

Step 5B: Repeat the step with second crossbar pad

Note: We recommend using the crossbar pads for safety and comfort and placing them on the cross bars you will use. These can be easily moved when needed.

Step 6 : add pad covers

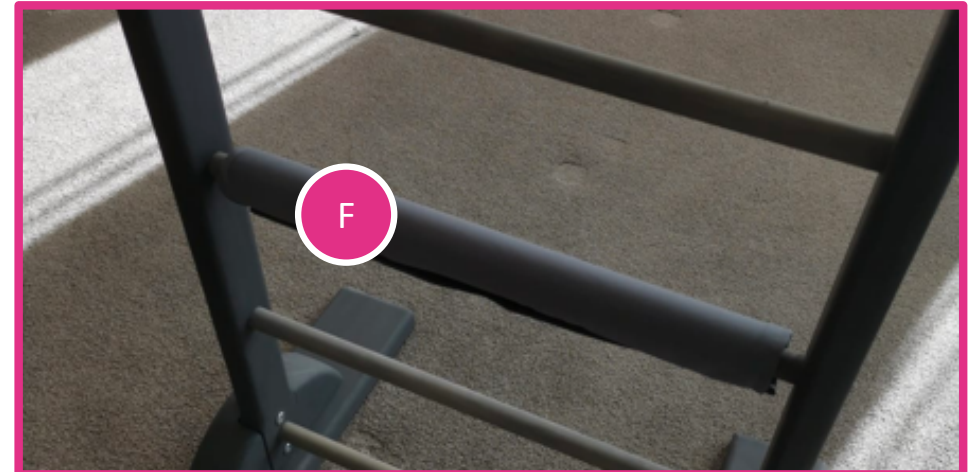

Step 6A: With the crossbar pad on the cross bar take the cover and wrap around making sure that the velco matches and sits nice and tight around the pad.

Step 6B: Repeat the step with second crossbar pad cover

Note: The right direction to wrap the cover is shown in the picture above so that the Velcro comes together correctly and keeps cover in place.